

# Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

**Supplier's name or trade mark:** ChiliTec GmbH

**Supplier's address:** Technik, Bäckerberg 12, 38165 Lehre, DE

**Model identifier:** 23286

## Type of light source:

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type (or other electric interface)	wire		
Mains or non-mains:	MLS	Connected light source (CLS):	Nein
Colour-tuneable light source:	Nein	Envelope:	-
High luminance light source:	Nein		
Anti-glare shield:	Nein	Dimmable:	No

## Product parameters

Parameter	Value	Parameter	Value
<b>General product parameters:</b>			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	3	Energy efficiency class	F
Useful luminous flux ( $\phi_{use}$ ), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	240 in Wide cone (120°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2 900
On-mode power ( $P_{on}$ ), expressed in W	3,0	Standby power ( $P_{sb}$ ), expressed in W and rounded to the second decimal	0,00
Networked standby power ( $P_{net}$ ) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	82
Outer dimensions without	Height	Spectral power distribution in the	See image in last page
	Width		
	Depth		


separate control gear, lighting control parts and non-lighting control parts, if any (millimetre)		range 250 nm to 800 nm, at full-load	
Claim of equivalent power <sup>(a)</sup>	-	If yes, equivalent power (W)	-
		Chromaticity coordinates (x and y)	0,400 0,400
<b>Parameters for LED and OLED light sources:</b>			
R9 colour rendering index value	1	Survival factor	0,50
the lumen maintenance factor	0,70		
<b>Parameters for LED and OLED mains light sources:</b>			
displacement factor (cos $\phi_1$ )	0,90	Colour consistency in McAdam ellipses	5
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-
Flicker metric (Pst LM)	0,9	Stroboscopic effect metric (SVM)	0,5

(a): not applicable;

(b): not applicable;

### CIE Colorimetric Parameters

Chromaticity coordinates:  $x=0.4310$   $y=0.4001$   $u(u')=0.2484$   $v=0.3459$   $v'=0.5189$   
CCT:  $T_c=3070K$  ( $duv=-0.00075$ ) Color Ratio:  $R=0.243$   $G=0.731$   $B=0.027$   
Peak Wavelength: 605nm Half Bandwidth: 121.2nm  
Dominant Wavelength: 583.8nm Color Purity: 0.495  
Rendering Index:  $R_a=81.7$   
R1 =81 R2 =92 R3 =94 R4 =79 R5 =81 R6 =91 R7 =80 R8 =56  
R9 =1 R10=83 R11=78 R12=73 R13=84 R14=97 R15=73

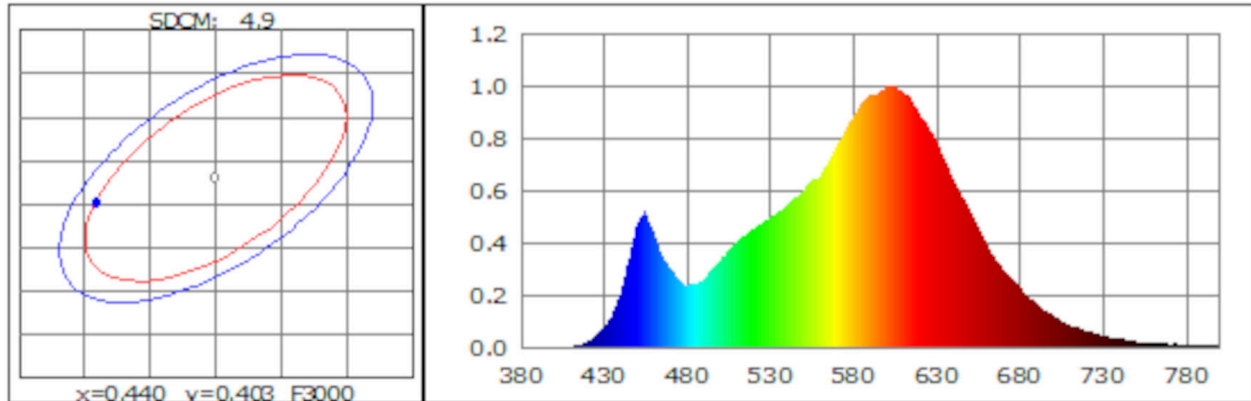

# Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

**Supplier's name or trade mark:** ChiliTec GmbH

**Supplier's address:** Technik, Bäckerberg 12, 38165 Lehre, DE

**Model identifier:** 23287

## Type of light source:

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type (or other electric interface)	Wire		
Mains or non-mains:	MLS	Connected light source (CLS):	Nein
Colour-tuneable light source:	Nein	Envelope:	-
High luminance light source:	Nein		
Anti-glare shield:	Nein	Dimmable:	No

## Product parameters

Parameter	Value	Parameter	Value
<b>General product parameters:</b>			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	3	Energy efficiency class	F
Useful luminous flux ( $\phi_{use}$ ), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	250 in Wide cone (120°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2 900
On-mode power ( $P_{on}$ ), expressed in W	3,0	Standby power ( $P_{sb}$ ), expressed in W and rounded to the second decimal	0,00
Networked standby power ( $P_{net}$ ) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	80
Outer dimensions without	Height	Spectral power distribution in the	See image in last page
	Width		
	Depth		

separate control gear, lighting control parts and non-lighting control parts, if any (millimetre)		range 250 nm to 800 nm, at full-load	
Claim of equivalent power <sup>(a)</sup>	-	If yes, equivalent power (W)	-
		Chromaticity coordinates (x and y)	0,300 0,300
<b>Parameters for LED and OLED light sources:</b>			
R9 colour rendering index value	-2	Survival factor	0,50
the lumen maintenance factor	0,70		
<b>Parameters for LED and OLED mains light sources:</b>			
displacement factor (cos $\phi_1$ )	0,90	Colour consistency in McAdam ellipses	4
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-
Flicker metric (Pst LM)	0,9	Stroboscopic effect metric (SVM)	0,5

(a): not applicable;

(b): not applicable;

### CIE Colorimetric Parameters

Chromaticity coordinates:  $x=0.3729$   $y=0.3795$   $u(u')=0.2191$   $v=0.3345$   $v'=0.5017$   
CCT:  $T_c=4229K$  ( $d_{uv}=0.00358$ ) Color Ratio:  $R=0.185$   $G=0.786$   $B=0.029$   
Peak Wavelength:  $445nm$  Half Bandwidth:  $25.7nm$   
Dominant Wavelength:  $577.2nm$  Color Purity:  $0.258$   
Rendering Index:  $R_a=80.3$

R1 =78	R2 =84	R3 =91	R4 =82	R5 =79	R6 =80	R7 =85	R8 =63
R9 =-2	R10=65	R11=82	R12=63	R13=79	R14=95	R15=71	

